

Weschler Bargraph Meters

- Precise digital & vivid proportional (bar) display
- 101 segment single color bar, up to 10" high
- 3 1/2, 4 1/2 or 5 1/2 digit resolution
- Versatile selection of inputs
- Up to 6 form A or 4 form C relay outputs
- Peak/Valley option
- Analog retransmit option
- AC or DC power
- Rugged case

CONFIGURATION OPTIONS

SIZE		POWER	
BG252	6" Vertical BarGraph	120V AC 50/60Hz	
BH252	6" Horizontal BarGraph	240V AC 50/60Hz	
PC101	DIN Size Vertical BarGraph	5V DC	
PH101	DIN Size Horizontal BarGraph	12V DC	
PC202	DIN Size Dual BarGraph	24V DC	
PG101	Single BarGraph	28V DC	
PG202	Dual BarGraph	48V DC	
BI1251	6" Vertical BarGraph	125V DC	
BW1316	6" Vertical BarGraph	250V DC	
BV5A	7 1/2" Vertical BarGraph	120V AC / 125V DC	
BD101	10" Vertical BarGraph		
BG241	4 1/2" Square BarGraph		
BG261	8 1/2" Square BarGraph		
BG281	8" Circle BarGraph		
BG251	6" Circle BarGraph		
INPUT		SETPOINTS	
DC Volts	50mV to 250V full scale	Hi/Lo	
DC Amps	50µA to 5A full scale	Hi/Hi-Hi	
AC Volts RMS	50mV to 250V full scale	Lo/Lo-Lo	
AC Amps RMS	1mA to 5A full scale	Hi-Hi/Hi/Lo/Lo-Lo	
Process	4-20mA DC		
	1-5V DC		
	10-50mA DC		
Line Frequency	55-65 Hz	COMMUNICATION	
MAG Pickup	50Hz-20kHz	RS232	
Thermocouple	J, K or T	RS485	
RTD	100 ohm Pt or 10 ohm Cu	Ethernet	
Watts	single & polyphase	ModBus	
VARs			
Power Factor		RETRANSMIT	
		4-20mA	
		0-1mA	
		1-5V DC	
		0-1V DC	
		10-50mA DC	
		Excitation Power 24 VDC	

LED COLOR
Green
Amber
Red


BAR COLOR
Green
Amber
Red

Over 10,000 combinations available.


For more information see weschler.com/bargraph



BG241

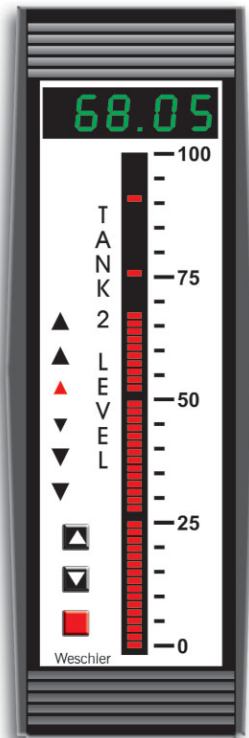

BG252

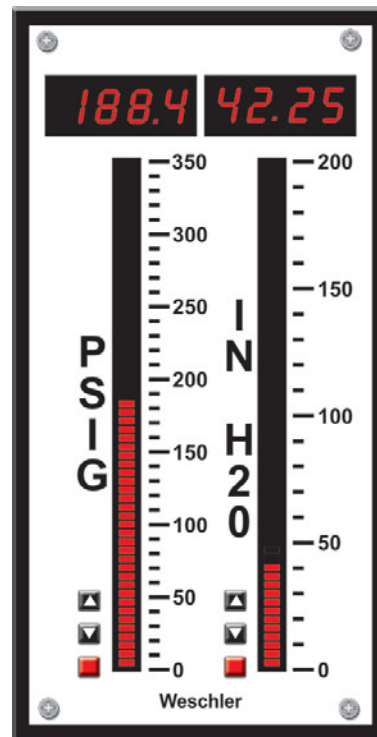

PC202