


## Instrument Transformer AC Split Core Current Transformers

**Model 600 – Window 2 x 5.5"**  
**Model 601 – Window 4.5 x 4.5"**  
**Model 604 – Window 1.42 x 1.53"**

- 50-400 Hz
- 0.6kV, BIL 10kV FW

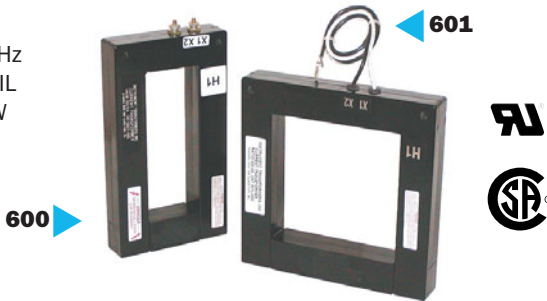

Leads (600, 601, 604) #16 AWG, 24"

### ORDERING INFORMATION - MODEL 600

Order Code	Current Ratio	ANSI Metering Class @ 60 Hz			VA @ 1% Class
		B0.1	B0.2	B0.5	
600-401	400:5	2.4	4.8		1.5
600-501	500:5	2.4	4.8		2.0
600-601	600:5	2.4	2.4		2.5
600-801	800:5	1.2	1.2	2.4	5.0
600-102	1000:5	1.2	1.2	2.4	7.5
600-122	1200:5	0.6	1.2	1.2	15.0
600-152	1500:5	0.6	0.6	1.2	20.0
600-162	1600:5	0.6	0.6	1.2	20.0
600-202	2000:5	0.6	0.6	0.6	30.0

### ORDERING INFORMATION - MODEL 601


Order Code	Current Ratio	ANSI Metering Class @ 60 Hz			VA @ 1% Class
		B0.1	B0.2	B0.5	
601-401	400:5	4.8	-	-	1.0
601-501	500:5	4.8	4.8	-	1.5
601-601	600:5	2.4	4.8	-	2.0
601-801	800:5	1.2	2.4	4.8	2.5
601-102	1000:5	1.2	1.2	4.8	5.0
601-122	1200:5	1.2	1.2	2.4	10.0
601-152	1500:5	1.2	1.2	1.2	15.0
601-162	1600:5	1.2	1.2	1.2	15.0
601-202	2000:5	0.6	0.6	1.2	20.0

### ORDERING INFORMATION - MODEL 604

Order Code	Current Ratio	Burden VA	Accuracy
604-101	100:5	1	±5%
604-1250	125:5	1	±5%
604-151	150:5	2	±4%
604-1750	175:5	2	±3%
604-201	200:5	2	±2%
604-251	250:5	2	±2%
604-301	300:5	2	±1.5%
604-401	400:5	2.5	±1.5%
604-1000T	100:0.1	-	±3%

**Model 613 – Window 0.8 x 1.95"** (indoor only)  
**Model 606 Weatherproof - Window 2.7 x 2.75"**  
**Model 608 Weatherproof – Window 2.6 x 6.25"**

- 50-400 Hz.
- 0.6 kV, BIL 10 kV FW

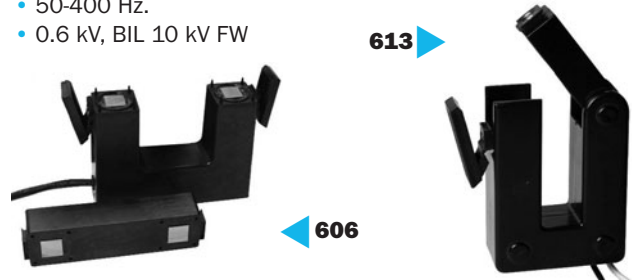

Leads (613) #16 AWG, 24"

Secondary Cable (606, 608) #16 AWG, 6ft

### ORDERING INFORMATION - MODEL 613

Order Code	Current Ratio	Burden VA	Accuracy 60Hz
613-101	100:5	1	5%
613-1250	125:5	1.25	5%
613-151	150:5	1.5	5%
613-1750	175:5	1.75	5%
613-201	200:5	2.5	4%
613-251	250:5	2.5	4%
613-301	300:5	3	2%
613-401	400:5	3	2%

### ORDERING INFORMATION - MODEL 606

Order Code	Current Ratio	Burden VA	Accuracy 60Hz
606-201	200:5	2.5	2%
606-251	250:5	3	1%
606-301	300:5	3.5	1%
606-351	350:5	4	1%
606-401	400:5	5	1%
606-501	500:5	6	1%
606-601	600:5	8	1%
606-751	750:5	10	1%
606-801	800:5	12	1%
606-102	1000:5	15	1%
606-122	1200:5	20	1%

### ORDERING INFORMATION - MODEL 608

Order Code	Current Ratio	Burden VA	Accuracy 60Hz
608-501	500:5	6	1%
608-601	600:5	8	1%
608-801	800:5	12	1%
608-102	1000:5	13	1%
608-122	1200:5	16	1%
608-152	1500:5	25	1%
608-162	1600:5	27	1%
606-202	2000:5	33	1%
608-252	2500:5	42	1%
608-302	3000:5	50	1%
608-322	3200:5	54	1%