
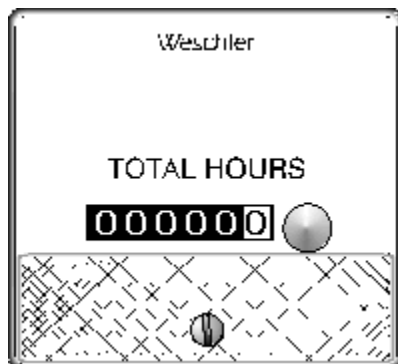


FEATURES AND SPECIFICATIONS

Elapsed Time Meters

WESCHLER INSTRUMENTS

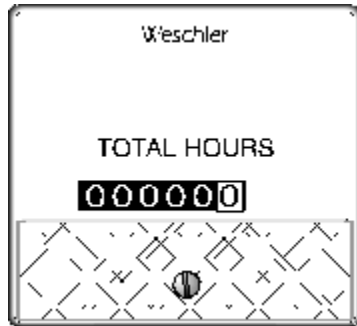

Application

Weschler GH and BH elapsed time meters indicate the total time that a particular circuit is energized. They are used for maintenance scheduling of electrical equipment (including diesel generators, motors, welders, and radio and television transmitters) and tube replacement programs.

Each consists of synchronous motor and cyclometer type register. When energized by the circuit being monitored, the motor drives the register (which has six digit wheels) to indicate up to 99,999.9 hours or minutes as a highly visible numerical strip across the center of the dial.

BH-351 meters are housed in an attractive molded case and diecast cover assembly which matches the appearance of Weschler conventional panel instruments. They can be mounted from either the front or back of the panel, and are available with or without reset knob.

Type GH-332 and GH-352 meters have a similar mechanism housed in a thermosetting case with a clear acrylic plastic cover. They are identical in appearance with Weschler 20/20 custom panel instruments. They harmonize with most other modern panel mounted components. A bezel kit is used for rear-of-panel mounting. The bezel mounted meters may be illuminated from behind the panel.

Specifications

Insulation Rating:

working voltage to ground - 800V.

Range: 0-99,999.9 hours or minutes.

Net Weight: 1 pound.

Shipping Weight: 2 pounds.

Available Ratings

Register Indication	Volts	Frequen Hertz
0-99,999.9 hours	120	50
0-99,999.9 hours	120	60
0-99,999.9 hours	240	60
0-99,999.9 hours	480	60
0-99,999.9 minutes	120	60

