

3125/3126 Series

Panel/Window Mount Meters



Equivalent to Yokogawa Stylist®

2-1/2" 3125 D.C. Moving Coil

■ 3126 A.C. Rectifier

FEATURES

■ The 3100 Hoyt panel meter series consists of a popular industrial styled, high impact plastic case that is available for surface or window mounting applications.

■ This series of meters is equal in mounting and specifications to similar styled meters of other manufacturers.

SPECIFICATIONS

Accuracy: ±2% full scale value.

Resistance: ±15%

Dials: 100 or 90 degree arc, black lettering on white

background. Special dial colors and artwork are

available as an option.

Movement: Spring loaded pivot and jewel movement that

assures maximum torque and readability.

D.C. Ranges: Microammeters, Milliammeters, Ammeters,

Millivoltmeters and Voltmeters.

A.C. Ranges: Milliammeters, Ammeters, and Voltmeters.

Mounting: Specify (HS) Surface mount, (HW) Window mount


or (HB) Bezel mount.


Standard Options: Optional colors available on lower front cover,

mirror dials, acrylic case materials, suppressed zero ranges, VU meters.

UL Recognized meters available, add - UL to model

DIMENSIONS

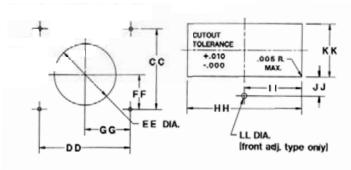



PANEL CUTOUT FOR BARREL

WINDOW MOUNT

MODELS	AA	BB	CC	DD	Ш	FF	GG	Ξ	=	IJ	KK	LL
3125/26	3.000	1.600	1.880	1.880	2.180	0.940	0.940	2.900	1.450	0.630	1.270	0.265

Dimensions in Inches

Hoyt Electrical Instrument Works Inc. 23 Meter Street

Penacook, NH 03303

Phone: (800) 258-3652 Fax: (603) 753-9592

Email: sales@hoytmeter.com


www.hoytmeter.com H1117 17 Page 1 of 2



3125/3126 Series

Panel/Window Mount Meters

DIMENSIONS

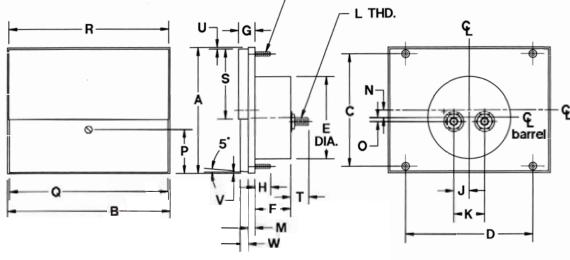


I THD.

SURFACE MOUNT

MODELS	Α	В	С	D	Е	F	G	Ι	- 1	J	K	L	М	N	0	Р	Q	R	S	T	U	٧	W
3125/26	2.29	2.99	1.88	1.88	2.08	1.16	0.40	0.50	4-48	0.48	0.97	10-32	0.16	0.00	0.00	0.86	2.89	2.91	1.23	0.50	0.06	0.04	0.19

Dimensions in Inches

WINDOW (HW)



Base is the same as the surface top. See surface dimensional chart for omitted base dimensions.


Window Mount:

This series is industrially styled and universally accepted with maximum dial visibility. The outside edges of the "window" that project through the panel are clear which yields maximum readability. All specifications and options are identical to those on previous page.

WINDOW MOUNT

MODELS	AA	BB	MM	PP	RR	SS	UU	WW
3125/26	2.28	3.01	.30	.64	2.89	1.26	.06	.15

Dimensions in Inches



Penacook, NH 03303

Phone: (800) 258-3652 Fax: (603) 753-9592

Email: sales@hoytmeter.com