

TYPE E • DC Ammeter Shunt

50MV 1500 through 2000 amperes
 100MV 1500 through 2000 amperes




50 MV

Catalog Number	AMP	A	B	C	D	E	F	G
E-1500-50	1500	9 ⁵ / ₈	3	1	3 ⁵ / ₈	7/16	2	1/2
E-2000-50	2000	9 ⁵ / ₈	4	1	3 ⁵ / ₈	7/16	2	1

100 MV

Catalog Number	AMP	A	B	C	D	E	F	G
E-1500-100	1500	11 1/4	3	1	5 1/4	7/16	2	1/2
E-2000-100	2000	11 1/4	4	1	5 1/4	7/16	2	1

DIMENSIONS in inches. TOLERANCES ±.015 for hole diameters. Other tolerances ±.030 unless otherwise noted.

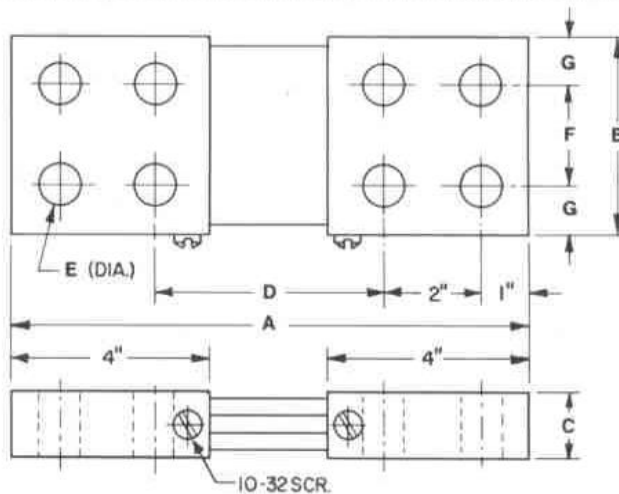

EMPRO MANUFACTURING CO., INC. BOX 26064 • INDIANAPOLIS, IN 46226
 PHONE (317) 823-4478

