

TTRU1 - BASIC, ADV

Handheld transformer turns ratiometer



- **Single phase source and measurement for single phase, three phase, and instrument transformer testing:**
 - Turns ratio, excitation current, and polarity
 - Up to 62.5 V induced, ± 0.05 % accuracy
- **Go/No Go short circuit, open circuit, and inductance winding tests**
- **Accuracy guaranteed from -20 °C to 50 °C**
- **Easily manage data with custom transformer entry, auto saving, USB export, and PowerDB import**
- **AA battery operated**
 - NiMH USB-C rechargeable batteries included

DESCRIPTION

Power through transformer electromechanical tests with the new TTRU1, the latest handheld transformer turns ratiometer from Megger. Perform routine polarity validation and turns ratio tests on power, distribution, and instrument transformers guided by colour-coded leads, clamps, and customisable on-screen vectors that match the transformer nameplate under test. In addition to turns ratio tests, the TTRU1 adds go/no-go short circuit, open circuit, and inductance test capabilities. The easy to follow setup ensures the right result the first time - just click start and perform over 1000 turns ratio tests on a single NiMH AA battery charge! When it's time to recharge the batteries, connect to any standard USB wall charger or connect to your PC.

STANDARD FEATURES

- **Automatic results storage**
- **Microsoft Excel export**
- **Full colour Hi-bright LCD screen**
- **TTR Up to 62.5 V AC, ± 0.05 % accuracy**
- **Additive/Subtractive polarity detection**
- **Excitation current**
- **Auto screen dimming and power off**
- **Pass/Fail ratio evaluation**
- **Instrument self-check**
- **USB drive save and export**
- **Belt loop carry bag**
- **Battery operated with USB-C Rechargeable AA NiMH batteries included**

ADDITIONAL FEATURES

- **PowerDB Import**
- **Customisable transformer vector list and voltages**
- **Guided three phase transformer tests**
- **Go/No Go short circuit impedance, open circuit, impedance**
- **USB printer**
- **Hand crank and solar battery pack**

DETAILED DESCRIPTION

The TTRU1 is designed to test distribution, instrument (CTs and PT/VTs), and power transformers. With minimal input from the user, the TTRU1 delivers the required AC voltage and current to obtain accurate results.

Reduce training time with the intuitive full colour Hi-bright LCD user interface of the TTRU1. The configurable vector list in the TTRU1-ADV model saves information for transformers routinely tested, simplifying selection of common transformer configurations and results interpretation. When exported, results are grouped by file name, producing an XLSX/PDF report that is easy to read, email, or import into PowerDB. If you need results on the spot, use the optional USB printer!

Perform up to 1000 TTR tests on a single charge with AA NiMH batteries installed from the factory. When it is time to charge the batteries, connect the provided USB-C cable to any wall charger or computer USB port.

The information herein is subject to change without notice

TTRU1 - BASIC, ADV Handheld Transformer Turns Ratiometer

TTR - Turns ratio testing

When compared to other single phase turns ratio test instruments, the TTRU1 is easier to use as you don't need to know the proper test voltage to obtain a valid test result.. The TTRU1 uses the latest technological advancements, providing safe, repeatable, and reliable results.

Additive/Subtractive polarity recognition

Polarity recognition provides confidence in transformer results by performing vector group validation during every test. Results on screen show if the connected distribution transformer is additive or subtractive.

Excitation current



Included with the TTR test, the excitation current test is extremely useful in locating problems such as defects in magnetic core balance, magnetic core structure, shifting windings, failures in the turn-to-turn insulation, or problems in tap changers.

Custom vector list/voltages – TTRU1-ADV

Increase efficiency by saving up to 10 commonly used transformer vectors and voltages found in the power network. Recall saved transformer vectors and test with confidence that the setup and evaluations are correct.

Go/No Go short circuit, open circuit, and inductance – TTRU1-ADV

Go/No go short circuit, open circuit, and inductance winding tests provides confidence that the high and low side of a distribution transformer does not have easily identifiable failures.

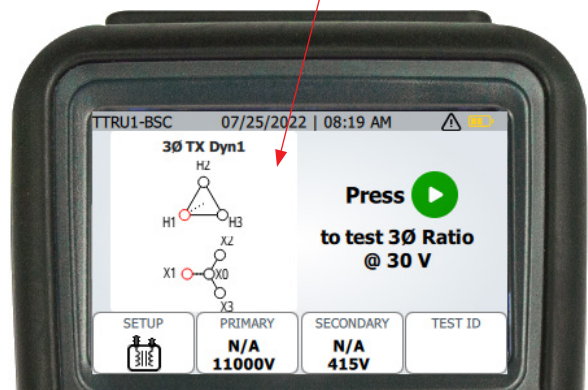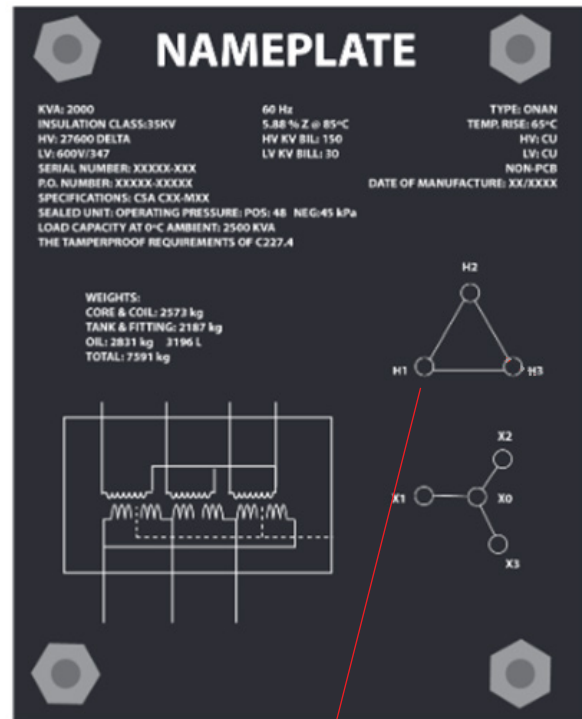

TTRU1 - BASIC, ADV

Handheld Transformer Turns Ratiometer

SPECIFICATIONS

Input power

6 x IEC LR6 1.5 V alkaline (AA)

6 x IEC HR6 1.2 V NiMH rechargeable (AA)

Battery life

1000 TTR tests on a single charge

Storage: 1+ years NiMH, 5+ years alkaline

Battery charging

USB-C when set to NiMH batteries

Protection against alkaline charging

PowerEx PRO NiMH battery charging: 0 to 45 °C.

Output

Voltage Single phase, 1-50 V

Current 0.1 mA – 1 A

Frequency range 40 – 480 Hz

Regulatory

Safety IEC 61010-1:2010 + AMD1:2016

EMI/EMC IEC 61326-1:2012

RoHS2 EN50581

Vibe/Shock MIL-STD -810G

Ingress IP54

Transformer testing standards

IEEE C57.152-2013

IEC 60076-1:2011

AS/NZS 6076 1:2014

CIGRE 445 2011

GOST 3484.1-88

Dimensions

22.8 x 10.5 x 7.5 cm 8.98 x 4.1 x 2.95 in

Weight

1 kg 2.2 lbs

Case

Heavy duty over-molded case with built in connection for hook strap. Carry case with quick start guide, belt loop hook, and pouches for included lead set and accessories.

Internal/external data storage

Up to 10 custom vector storage

Up to 10 000 sets of single phase results internal storage

Transferable via USB 2.0 drive

Communication/control software

USB Interface for PC download with custom GUI

Display

Full colour 88 mm (3.5 in) 320 x 240 px Hi-bright LCD screen with 'auto dim' and 'auto off' to preserve battery life

Printer (optional)

51 mm (2 in) thermal printer

Prints all measurement data displayed on GUI

Environmental

Operating -20 ° to 50 °C (-4 ° to 122 °F)

Storage -30 ° to 70 °C (-22 ° to 158 °F)

Relative humidity 0-90 %, non-condensing

TTR

Turns ratio measurement methods

Single phase step down

Turns ratio range and accuracy

Step down excitation

25 - 50 V

±0.05 % 0.8 – 1000

±0.10 % 1001 – 2000

±0.30 % 2001 – 15000

±1.0 % 15000 +

1-24 V

±0.10 % 0.8 – 1000

±0.20 % 1001 – 2000

±0.60 % 2001 – 15000

±2.0 % 15000 +

Excitation current resolution

Resolution 0.1 mA, 0.1 mA – 100 mA

1.0 mA, 101 mA – 1000 mA

Excitation current accuracy

±1 % Reading, ±0.1 mA

Frequency accuracy

±1 % Reading, ±0.1 Hz

Max voltage output

45 V AC peak

TTRU1 - BASIC, ADV

Handheld Transformer Turns Ratiometer

| TTRU1 Selection Guide | | |
|---|-------------|-----------|
| Model | TTRU1-BASIC | TTRU1-ADV |
| Full colour Hi-bright LCD screen | | ■ |
| Max turns ratio | 50 000 Down | |
| Max induced voltage | 37.5 V | 62.5 V |
| Max current | 1 A | |
| Pass / Fail ratio evaluation | | ■ |
| Additive/ Subtractive polarity validation | | ■ |
| Excitation current measurements | | ■ |
| Automatic results storage | | ■ |
| Auto dim and power off battery saving | | ■ |
| Self-check diagnosis | | ■ |
| USB drive save and export | | ■ |
| Battery operated NiMH or alkaline | | ■ |
| USB-C NiMH battery charging | | ■ |
| Soft carry bag with belt loop hook | | ■ |
| Microsoft Excel export | | ■ |
| PowerDB Import | | ■ |
| Go/No Go short circuit, open circuit, inductance | | ■ |
| Customisable transformer vector list and voltages | | ■ |
| USB printer | Optional | |
| Hand crank/solar battery charger pack | Optional | |

■ = INCLUDED

TTRU1 - BASIC, ADV

Handheld Transformer Turns Ratiometer

Authorized Distributor:

WESCHLER INSTRUMENTS

phone: 800-903-9870 440-378-6580

fax: 800-903-9590 440-238-0660

www.weschler.com info@weschler.com

ORDERING INFORMATION

| Item (Qty) | Cat. No. | Optional hardware accessories | |
|---|-------------|--|----------------|
| 1 Phase Handheld Turns Ratiometer | TTRU1-BASIC | Calibration certification | TTRU1-CAL-CERT |
| | TTRU1-ADV | Backpack lead bag | 2012-180 |
| Included accessories | | | |
| Soft carry case | 1012-063 | USB NiMH battery charger with outlet adapter | 90041-006 |
| USB C to A cable | 90041-001 | USB printer | 90029-573 |
| USB C to C cable | 90041-002 | USB printer paper (x48 rolls) | 90029-573-P |
| 2 m (6 ft) H and X leads | 1015-031 | USB outlet adapters (US, UK, CE) | 90041-003 |
| USB drive | 90012-878 | TRS1+ calibration standard | TRS1PLUS |
| Optional leads | | | |
| 3 m (9 ft) H and X leads | 1015-032 | Hand crank and solar battery pack | 90041-007 |
| 6 m (20 ft) H and X leads | 1015-033 | Magnetic strap | 1010-013 |
| 9 m (30 ft) H and X leads | 1015-035 | 12 V Car accessory outlet adapter | 90041-004 |
| 3 m (9 ft) H and X leads with banana connectors for CT/PT testing | 1015-037 | 15kV Tx probe adapter | 210.00012 |
| | | 25kV Tx probe adapter | 210.00011 |
| | | Bushing adapter | MC7144 |
| | | Hard sided case | 1015-532 |

The information herein is subject to change without notice

SALES OFFICE

Megger Valley Forge
400 Opportunity Way
Phoenixville,
PA 19460
USA

T. +1 610 676 8500

F. +1 610 676 8610

VFCustomerSupport@megger.com

TTRU1-BASIC-ADV_DS_en_V05

www.megger.com

ISO 9001

The word 'Megger' is a registered trademark

Megger ^R